


HİDROLİK DEVRE ŞEMASI CIRCUIT DIAGRAM

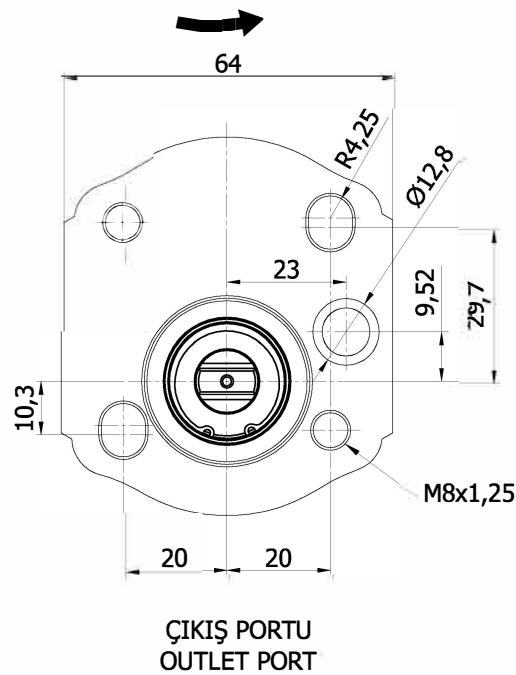

The image shows two technical line drawings of a 3-position solenoid valve. The top drawing shows the valve in a closed position, with the internal spool shifted to the left, blocking the flow from the inlet (left) to the outlet (right). The bottom drawing shows the valve in an open position, with the internal spool shifted to the right, allowing flow from the inlet (left) to the outlet (right). The drawings are isometric and show the internal components of the valve, including the spool, springs, and seals.

PUMP SPECIFICATION:

1. Oil : SAE 10 - 30W (Recommended)
2. Operation Temperature : 0°C to 80°C continuously ; -20°C to 100°C intermittent operation
3. Suction Pressure : Max. depression for continuous operation 0,25 bar
4. Filtration: At least cleanliness level 20/18/15 compliant with ISO 4406
5. Pump will be tested according to R1037 specification

A3

PROJE NO: PROJECT NO:					
		P1	APW10.035.CCE05SN-003 eklendi.	F.B.	22.01.2018
		P	Prototip için yayımlandı	F.B.	18.07.2017
DEĞ. NO: E. C. NO:	REV. ISSUE	DEĞİŞİKLİK CHANGED		KONTROL CHECKED	TARİH DATE