
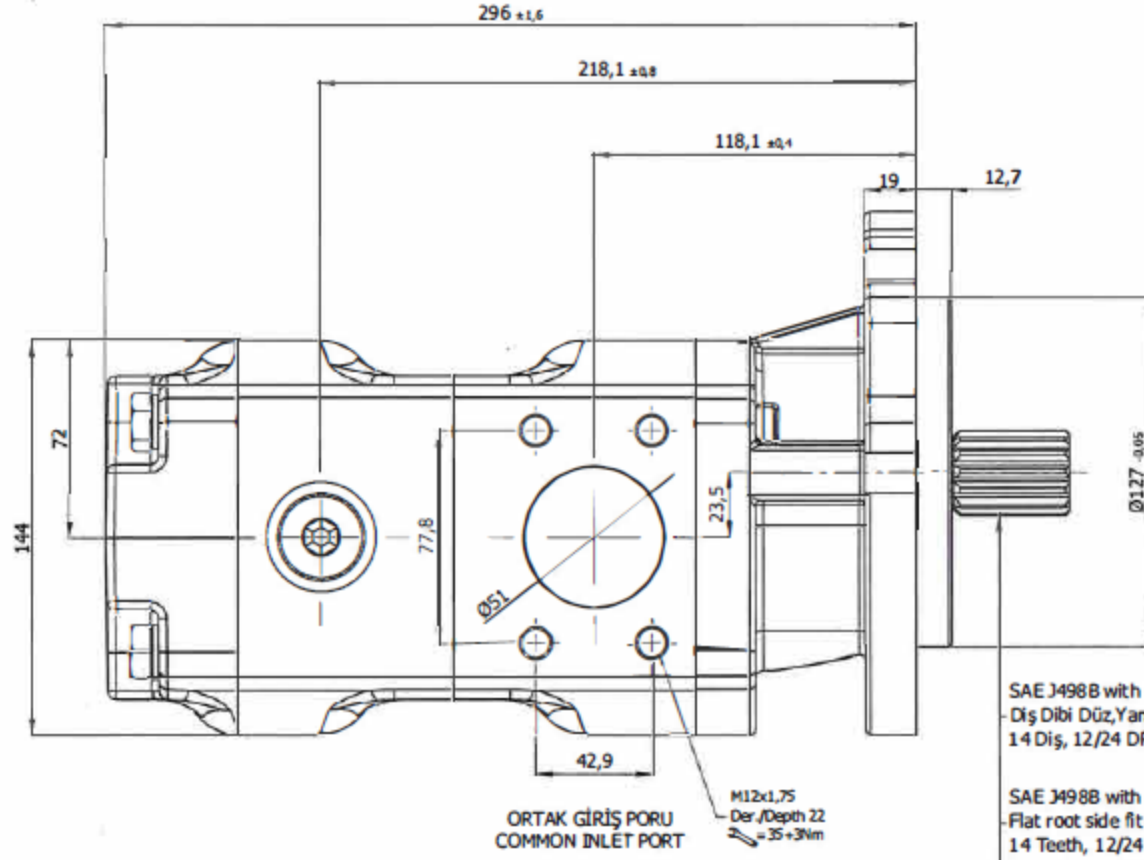






RESİM ÜZERİNDEN ÖLÇÜ ALMAYINIZ  
DO NOT SCALE



SAE J498B with major diameter modified  
Diş Dibi Düz, Yanaktan Alışmalı  
14 Diş, 12/24 DP, 30 Deg.

SAE J498B with major diameter modified  
Flat root side fit Class1  
14 Teeth, 12/24 DP, 30 Deg.

Maks. Tork 500 Nm  
Max. Torque

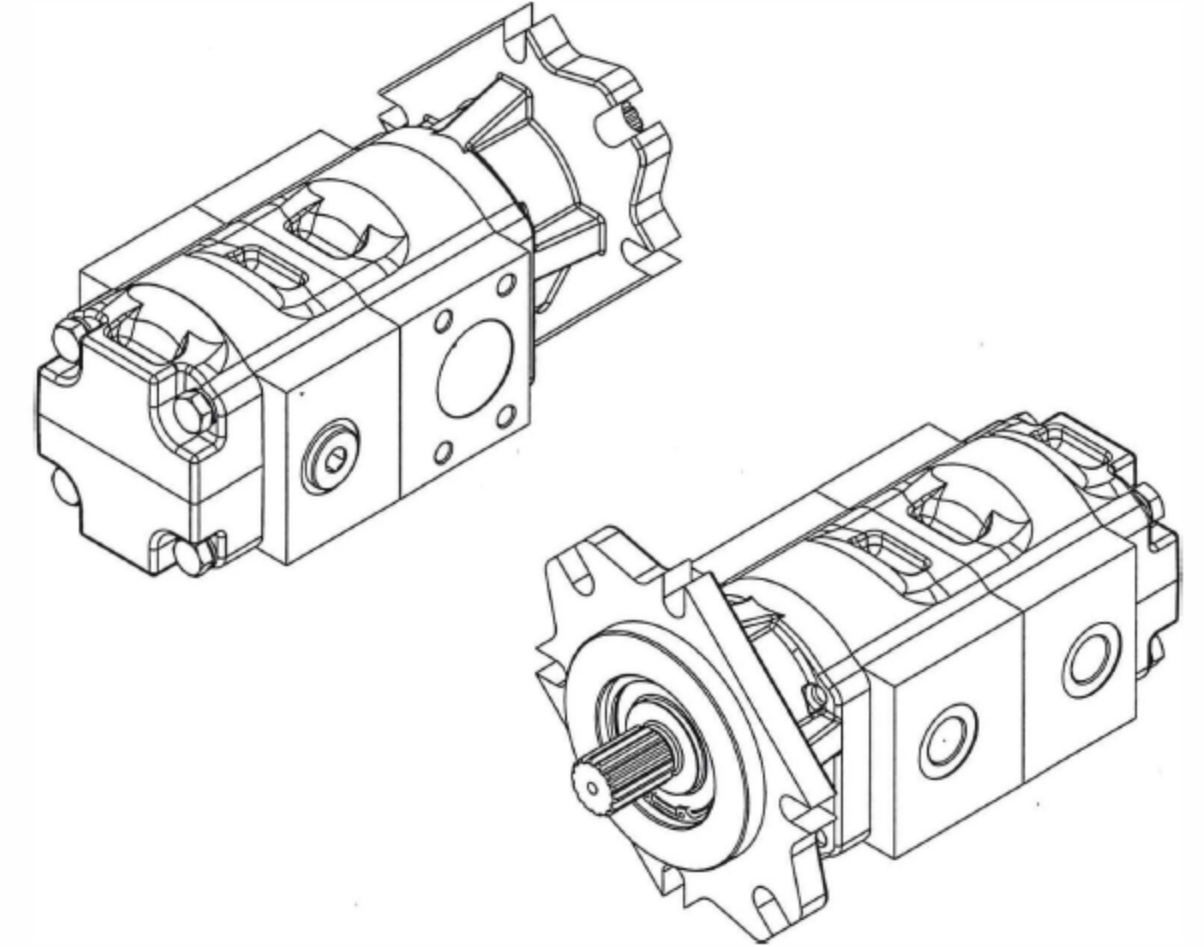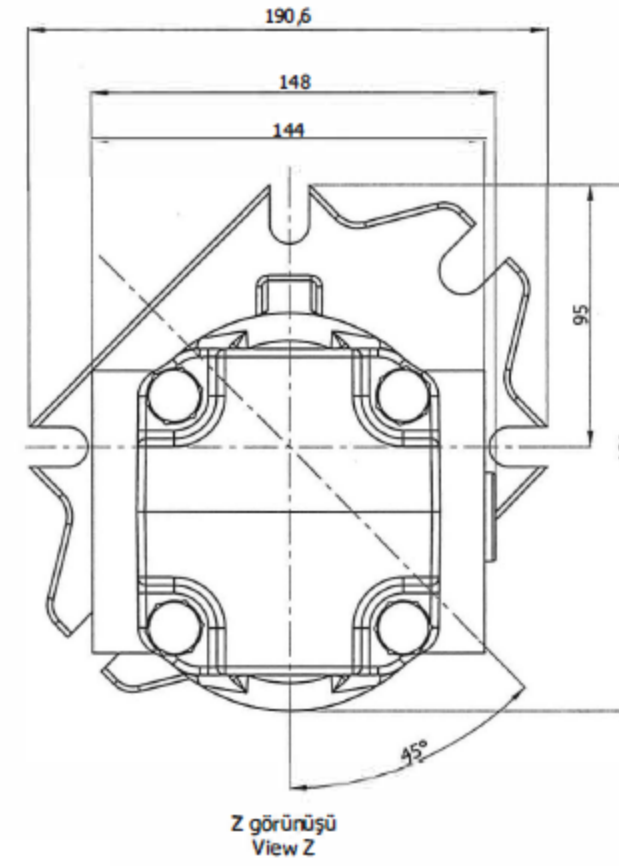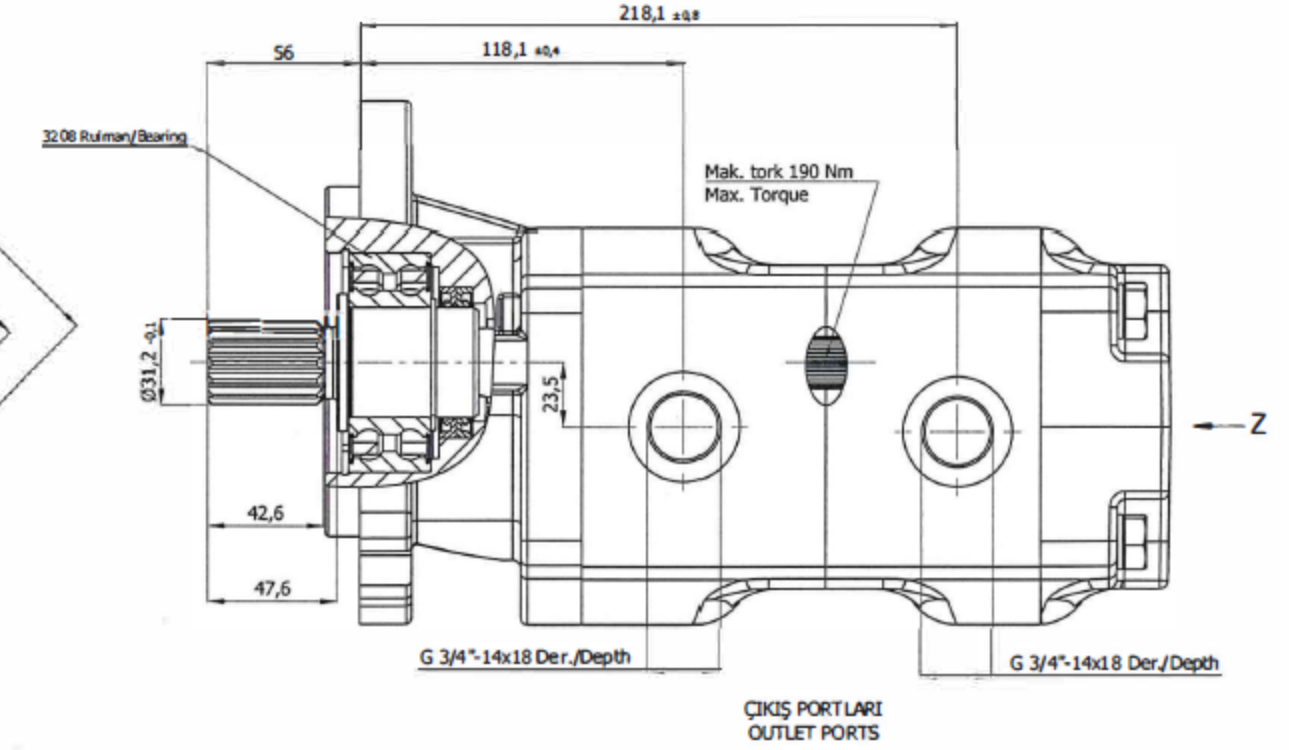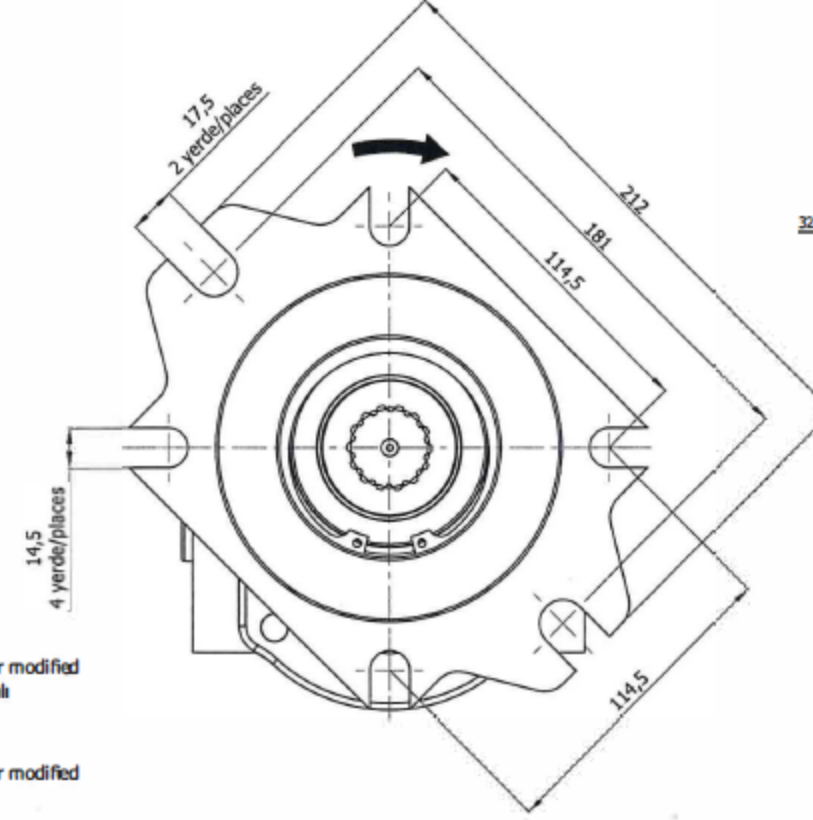

| Pompa Özellikleri / Pump Data                                              |                         |                                                                                                                        |      |
|----------------------------------------------------------------------------|-------------------------|------------------------------------------------------------------------------------------------------------------------|------|
| Pompa Kodu / Pump Code                                                     |                         | 6010721000054                                                                                                          |      |
| Pompa Tipi / Pump Type                                                     |                         | DMP30.430/270.CN3F753SON-003                                                                                           |      |
| Pompa Bölmesi / Pump Sections                                              |                         | 1                                                                                                                      | 2    |
| Dönüş Yönü / Rotation                                                      |                         | SAĞ / Clockwise                                                                                                        |      |
| İletim Hacmi (cm <sup>3</sup> /dev)<br>Displacement (cm <sup>3</sup> /rev) |                         | 43,0                                                                                                                   | 27,0 |
| Sürekli Çalışma Basıncı (bar)<br>Continuous Pressure (bar)                 | P1                      | 280                                                                                                                    | 280  |
| Aralıklı Çalışma Basıncı (bar)<br>Intermittent Pressure (bar)              | P2                      | 300                                                                                                                    | 300  |
| Ani Basınç (bar)<br>Peak Pressure (bar)                                    | P3                      | 320                                                                                                                    | 320  |
| Maks. emiş basıncı (bar)<br>Max. Suction Pressure (bar)                    |                         | 0,25                                                                                                                   |      |
| Hız (d/d)<br>Speed (rpm)                                                   | min.                    | 350                                                                                                                    |      |
|                                                                            | max.                    | 3000                                                                                                                   |      |
| Keçe Tipi / Seals Type                                                     |                         | NBR                                                                                                                    |      |
| Min. Sıcaklık (°C)<br>Min. Temperature (°C)                                | Sürekli / Continuous    | 0°                                                                                                                     |      |
|                                                                            | Aralıklı / Intermittent | -25°                                                                                                                   |      |
| Maks. Sıcaklık (°C)<br>Max. Temperature (°C)                               | Sürekli / Continuous    | +80°                                                                                                                   |      |
|                                                                            | Aralıklı / Intermittent | +100°                                                                                                                  |      |
| Kirlilik Sınıfı<br>Contamination Class                                     | Δp>200 bar<br>75-10 μm  | 8 - Nas 1638                                                                                                           |      |
|                                                                            |                         | 19/17/14 - ISO 4406                                                                                                    |      |
|                                                                            | Δp<200 bar<br>75-25 μm  | 10 - Nas 1638                                                                                                          |      |
|                                                                            |                         | 21/19/16 - ISO 4406                                                                                                    |      |
| Test Şartnamesi<br>Test Specification                                      |                         | R1037                                                                                                                  |      |
| Yağ / Oil                                                                  |                         | ISO/DIN Standartlarına Göre Mineral Esaslı Hidrolik Yağlar<br>Mineral Oil Based Hydraulics Fluids According to ISO/DIN |      |
| Boya/Paint                                                                 |                         | Black RAL9011                                                                                                          |      |
| Viskozite/Viscosity                                                        |                         | 20/120 cSt                                                                                                             |      |
| Başlangıç Viskozite<br>Start-up Viscosity                                  |                         | 1500 cSt                                                                                                               |      |



**Hydrax**  
гидрокомпоненты