

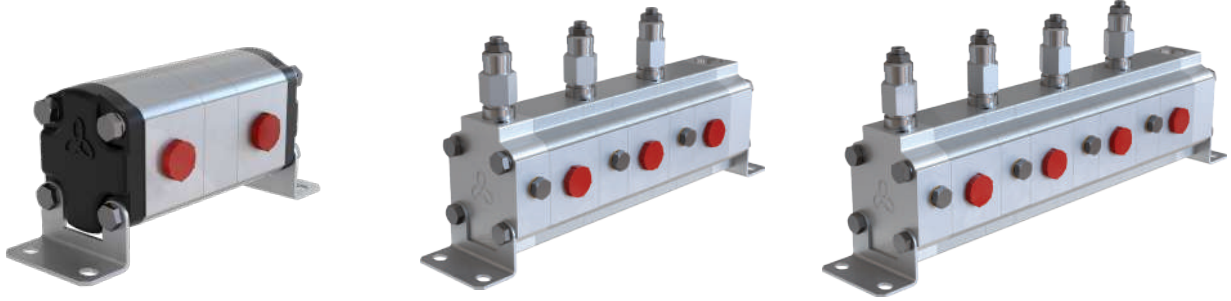


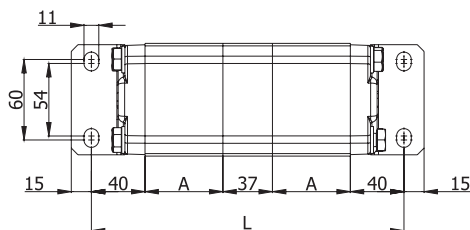
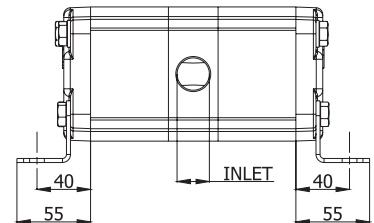





Tipi Type	cm ³ /rev	A	Giriş Inlet	Çıkış Outlet	(L) Boyu - Length						
					2	3	4	5	6	7	8
AFD20.X.4N	3,9	46,5	G 3/4"	G 1/2"	210,0	293,5	377,0	460,5	544,0	627,4	710,8
AFD20.X.6N	5,9	49,5			216,0	302,5	389,0	475,5	562,0	648,5	735,0
AFD20.X.8N	8,0	52,5			222,0	311,5	401,0	490,5	580,0	669,6	759,2
AFD20.X.9,5N	9,4	55,0			227,0	319,0	411,0	503,0	595,0	686,9	778,8
AFD20.X.11,5N	11,4	58,0			233,0	328,0	423,0	518,0	613,0	708,1	803,2
AFD20.X.14N	13,9	62,0			241,0	340,0	439,0	538,0	637,0	736,0	835,0
AFD20.X.16N	16,0	65,0			247,0	349,0	451,0	553,0	655,0	757,2	859,4
AFD20.X.19N	19,2	82,0			281,0	400,0	519,0	638,0	757,0	876,2	995,4
AFD20.X.22N	21,9	86,5			290,0	413,5	537,0	660,5	784,0	907,5	1031,0
AFD20.X.25N	24,8	91,6			300,0	429,0	557,5	686,0	815,0	943,6	1072,2
AFD20.X.28N	27,9	96,0			309,0	442,0	575,0	708,0	841,0	973,9	1106,9

Number of Elements	2	3	4	5	6	7	8
Number of Inlets	1	1	2	2	3	3	4

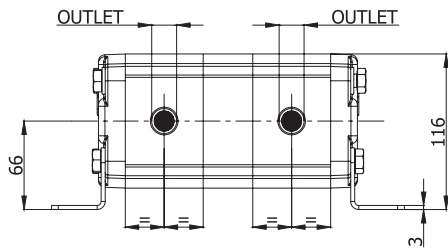

ORDERING CODE OF GROUP 20 FLOW DIVIDERS

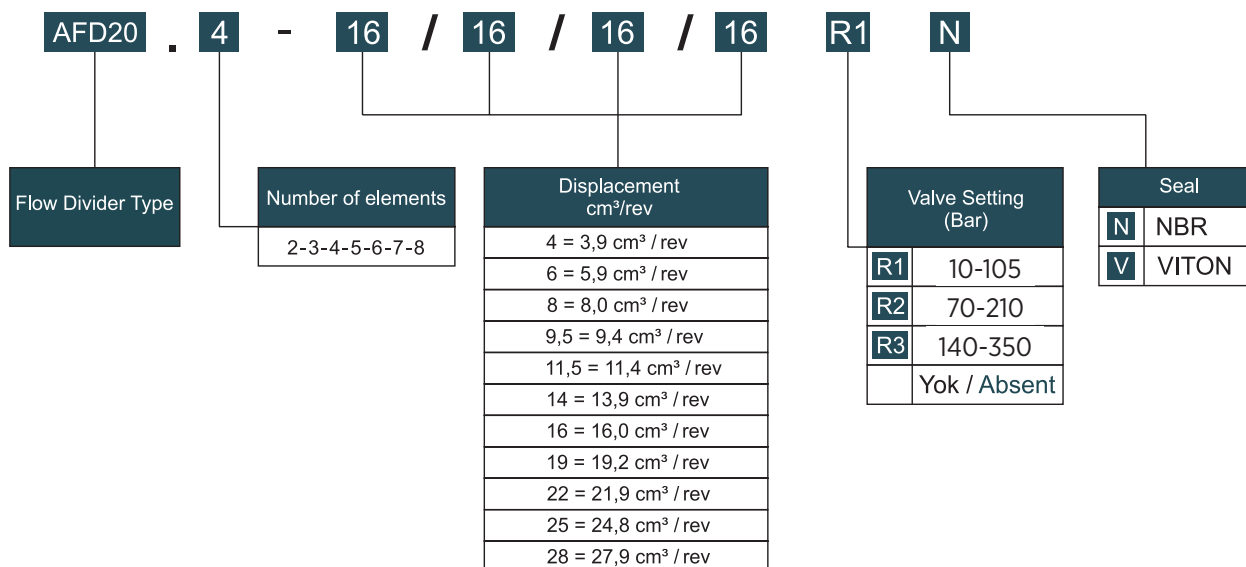

Code Example (Same displacement) ; AFD20.3-16N

Code Example (Different displacement) ; AFD20.3-16/14/11,5N

TECHNICAL DATA

Type	Displacement	Max. Pressure		ΔP	Max. Speed	Min. Speed	Min. Flow Rate	Maks. Flow Rate		
		P1	P3							
	cm³/rev	bar		bar	rpm		l/min			
AFD20.X.4N	3,9	250	280	50	3000	1250	4,8	11,2		
AFD20.X.6N	5,9						7,3	16,8		
AFD20.X.8N	8,0						10,0	22,8		
AFD20.X.9,5N	9,4				2750	1200	11,2	24,6		
AFD20.X.11,5N	11,4	13,8	29,8							
AFD20.X.14N	13,9	230	260	40			2500	1100	16,6	36,3
AFD20.X.16N	16,0								19,2	38,0
AFD20.X.19N	19,2				210	240			22,0	46,0
AFD20.X.22N	21,9	190	220		30	2000	1100		25,2	47,8
AFD20.X.25N	24,8	170	200	28,5				52,0		
AFD20.X.28N	27,9	160	190	32,0				54,7		

P1: Continuous pressure

P3 : Peak pressure

MAX. FLOW FOR INLET SECTION

80 lt/dk (l/min)